







DESSIN ET DIMENSION DU MOTEUR

CÂBLE MOTEUR PSC / 2-FILS / 3-FILS / TRIPHASÉ DOL

Câble moteur PSC / 3-fils / Triphasé				Câble moteur 2-fils		
0,25 - 3,0 kW				0,37 - 1,1 kW		
0 [mm ²]	B[mm]	Bl[mm]	H[mm]	0 [mm ²]	B[mm]	H[mm]
3xl,5 + lgl,5	16,8	10,7	5,0	3xl,5	10,7 ± 0,3	5,0 ± 0,3
  				  		
L [ml]	Modèle AISI304	Modèle AISI316		L [ml]	Modèle AISI304	
1,5	310113 401	310113 501		1,5	310134 401	
2,5	310113 402	310113 502		2,5	310134 402	
5	310113 405	310113 505		5	310134 405	
10	310113 410	310113 510		10	310134410	
15	310113 415	310113 515		15	310134 415	
20	310113 420	310113 520		20	310134 420	
30	310113 430	310113 530		30	310134 430	
40	310113 440	310113 540		40	310134440	
50	310113 450	310113 550				

Câble moteur Pollution Recovery 3-fils / Triphasé	
0,25 - 3,0 kW	
Ø [mm ²]	D Ø [mm]
1,5	9,8
  	
L[m]	Modèle AISI316
1,5	310 313 501
2,5	310 313 502
10	310113 510
20	310 313 520
30	310 313 530
40	310 313 540
50	310 313 550

Les câbles sont conçus pour fonctionner immergé dans l'eau. Pour fonctionnement à l'air veuillez consulter Franklin Electric

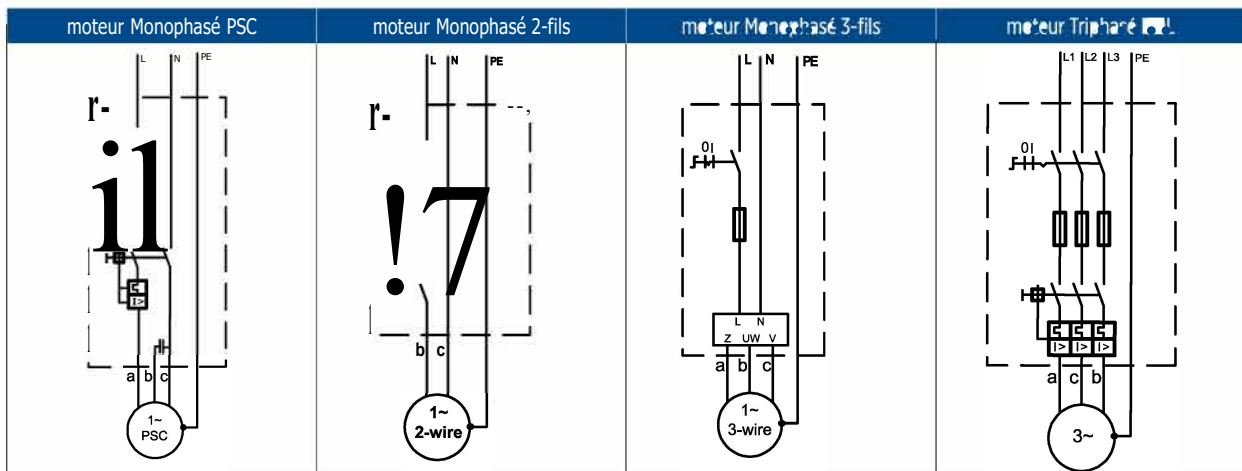

a = noir | b = marron | c = gris | PE = jaune/vert